


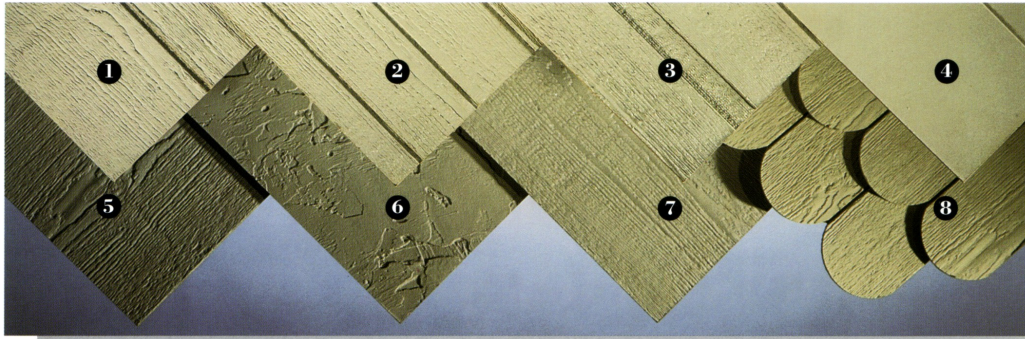

	Product	Thickness	Surface	Dimensions	Finish
1	8" o.c. 3/4" groove	7/16"	Cedartex	4' x 8'	Primed
2	4" o.c. groove	7/16"	Cedartex	4' x 8'	Primed
3	Reverse board and batten	7/16"	Cedartex	4' x 8', 4' x 9'	Primed
4	8" o.c. groove	7/16"	Smooth, Cedartex	4' x 8', 4' x 9'	Primed
5	Soffit panel	7/16"	Smooth, Cedartex	16" x 16'	Primed
6	Stucco	7/16"	Stucco	4' x 8', 4' x 9'	Primed
7	No groove	7/16"	Smooth, Cedartex	4' x 8'	Primed
8	Shadowround	7/16"	Cedartex	10" x 48"	Unprimed

Storage and Moisture

To keep Temple hardboard clean and maintain a uniform moisture content, warehouse it flat on stringers in an unheated, covered building. Likewise, job site storage should be on stringers, avoiding direct contact with the ground, and covered to prevent direct exposure to the elements.

Hardboard siding should be allowed to adjust to atmospheric conditions at the job site before installation, especially during cold, wet winter months.

Structural design should ensure that water does not accumulate against hardboard siding. Allow at least a 6" space between the bottom course of siding and the ground.

Cutting

Use a fine tooth hand or power saw. The cutting action should be into the face of the siding, i.e., face up with hand saws, face down with circular saws.

Application and Painting

Refer to the separate document "Hardboard Siding Application Instructions" for detailed installation and painting information.

Code Approvals and Certification

- International Conference of Building Officials (ICBO) Report #3392
- Building Officials and Code Administration (BOCA) Report #82-31
- Third party product certification by American Hardboard Association



Limited Warranty

Temple-Inland Forest Products Corporation warrants its hardboard siding to be free from substrate defects for a period of twenty-five (25) years and the factory-applied primer not to peel, crack or blister under normal exposure for a period of five (5) years from the date of original installation.

The warranties are effective only if hardboard siding is handled, stored, applied, finished, used and maintained according to our application instructions and current building industry standards.

For complete warranty requirements, contact:
Temple, P.O. Drawer N, Diboll, TX 75941



1-800-231-6060
www.templeinland.com

FS1106

Temple and the distinctive T-Wheel are trademarks of Temple-Inland Forest Products Corporation. ©1997 Temple-Inland Forest Products Corporation.